


Hortify Compact DUO

TESLUX



Hortify Master Controller


Specifications

Model	Controller GLC 2
Installation method	Wall Hanging
Screen	7 inch TFT LCD display
Dimensions (mm)	L 205 x W 129 x H 315(mm)
Net Weight	0.465 Kg
Input voltage of controller	DC 12V
Input voltage of adaptor	100-240V AC,50/60Hz
AC Current	1A
Material of shell	PC+ABS Etched black RAL9005
Fire rating of shell	94-V1
Sunrise / Sunset	Yes
Overheating protection	Yes
Connection Method	Wired connection or wireless connection


Specifications

Model	Hortify Compact DUO
AC Input Power(@277V AC)	V1 spectrum: 700W / F1 spectrum:760W
Efficacy	2.6-2.8 $\mu\text{mol/J}$ @ 277 AC
Light Output PPF	2128 $\mu\text{mol/s}$
Efficacy	43.2" x 45.6" x 31"
Dimensions (mm)	L 1098 x W 1158 x H 78.1(mm)V1+ F1
Net Weight	13.94Kg/Pc
Spectrum	V1+ F1
AC Input Voltage	120-277VAC, 347-480VAC,50/60Hz
Mounting Height	$\geq 12"$ (30cm)Above Canopy
Thermal Management	Passive
Max. Ambient Temperature	95°F/35°C
Dimming	0-10V Dimmable
Total Harmonic Distortion (THD)	<15%
Lifespan Warranty	>50,000 hours 3 Years Standard Warranty
Certificates	ETL,DLC,CE,RoHS


2.8 $\mu\text{mol/J}$ Draw Power: 700W 5'x5' Area

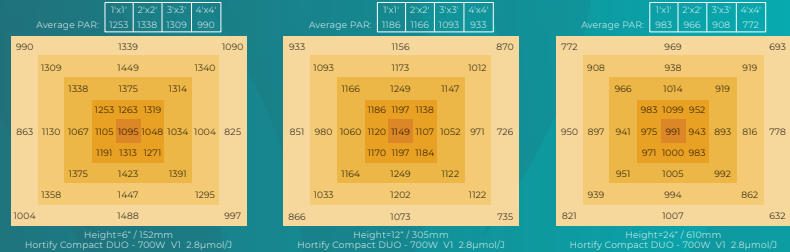


2.8 $\mu\text{mol/J}$ Draw Power: 760W 5'x5' Area

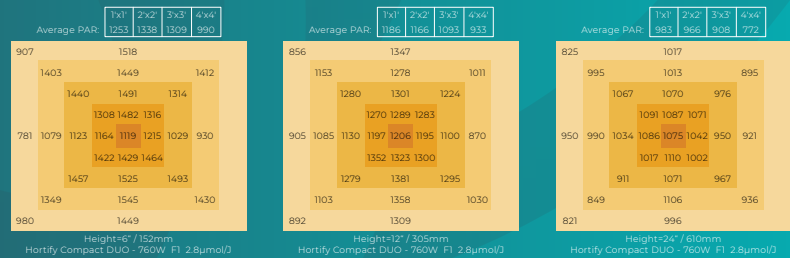


V1

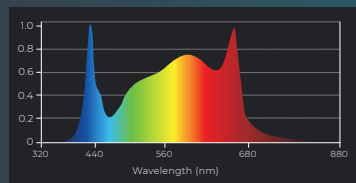

F1

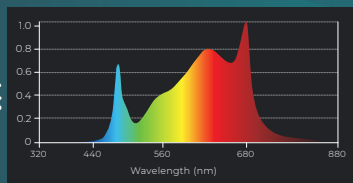

V1+F1

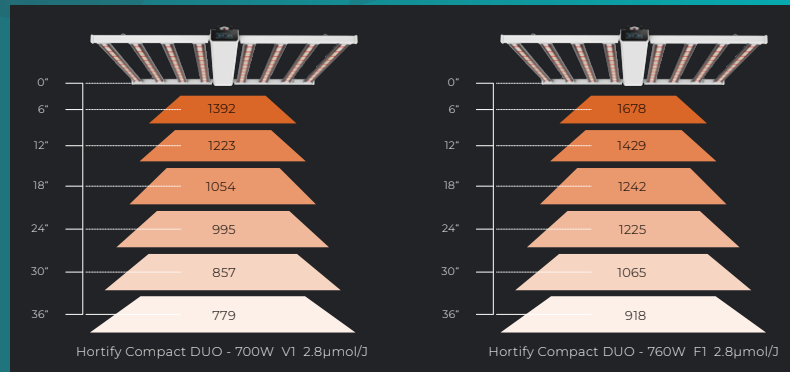

Powered by

SAMSUNG
OSRAM



www.hortify.eu

